

Wired Thermostat TSH 002 | black

Description

Podtynkowy regulator BHT-003GC jest dedykowany do kontroli temperatury indywidualnej strefy grzewczej wodnego ogrzewania płaszczyznowego, mat elektrycznych lub bezpośredniego podłączenia urządzenia grzewczego. Regulator temperatury pozwala na znaczne oszczędności, dzięki możliwości precyzyjnej kontroli zadanej temperatury.

Regulator pracuje w trybie dobowym, tygodniowym lub ręcznym.


Technical data

| | |
|--------------------------------------|----------------------------|
| Type: | wired |
| Visible depth: | 13mm |
| Colour: | black |
| Max medium temperature (continuous): | 45°C |
| Model: | Two-point controller |
| Rated voltage: | 24V 50/60Hz |
| Rated current: | 3A |
| Mounting method: | Flush-mounted (recessed) |
| Protection rating: | IP20 |
| Width: | 88mm |
| Height: | 88mm |
| Net weight: | 250g |
| Gross weight: | 280g |
| With thermal feedback: | no |
| Temperature range: | 5 - 35°C |
| Auxiliary switch: | no |
| Display: | yes |
| Programming via buttons: | yes |
| Programming via knob: | no |
| Backlight: | yes |
| Relay type: | Voltage free (dry contact) |
| Model: | TSH 002 24V B |
| Identification number: | 06038401 |



Basic properties

- Possibility of working in manual mode (permanently or temporarily)
- Compatibility with additional floor temperature sensor
- Memory backup function (controller settings are preserved during power outages)
- Anti-freeze function
- Made of fire-resistant PC+ABS material
- Compatible with TSH L800, TSH L801 control panel or any other
- Mounting options: Fits standard 86mm square backboxes or 60mm round backboxes

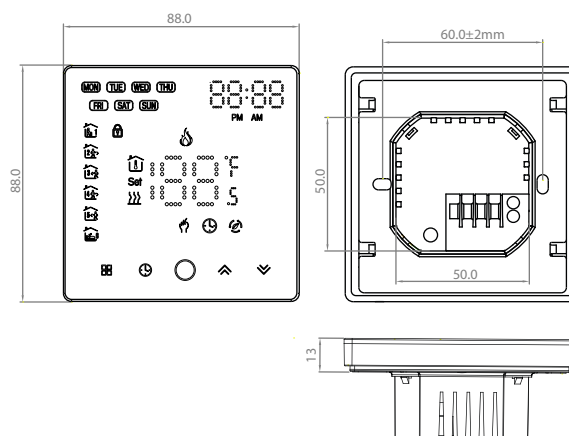

Tweetop sp. z o.o.
ul. Ludowa 24c I 71-700 Szczecin

Scope of delivery

Wired thermostat