


Description

The Intelligent central linkage controller was designed for controlling underfloor heating (8 zones). It allows convenient connection of wired temperature controllers and actuators. It features a built-in control module for the heating device and circulation pump. The TSH L800 regulates the room temperature by shutting off or opening the flow through the heating circuits using the thermoelectric actuators connected to the panel and mounted on the manifold. Additionally, the control panel allows for the setting of a pump and heating device start-up delay (0-30-45-60-120 s) and includes a test control for connected devices.

Technical data

Power supply	230V AC 50Hz
Max. load	9(1)A
Output	Pump (230V-3A) Boiler (NO/COM) Thermal actuators (230V)
Dimensions	240 x 110 x 42mm
Netto weight	500g
Gross weight	550g

Dimensions

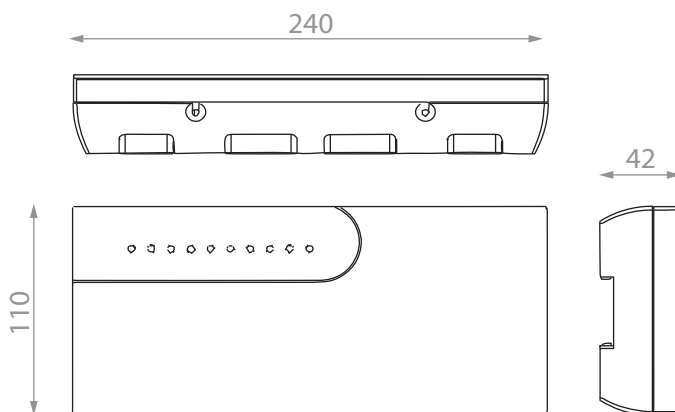

Connection diagram

